

**FR Series**
**THERMOLAST® K**

The FR Series is your material solution for applications requiring high flame retardance. The compounds are halogen free and available in natural and black colors.

**Typical applications**

- Cable holders
- Seals for in-wall outlets
- Seals for plugs
- Seals for switch boxes

**Material advantages**

- Easy coloring (compounds in natural colors)
- Excellent mechanical properties
- Halogen free (reduction of toxic fire gases)
- Self-extinguishing, no dripping of flaming particles
- UL 94-V0 (3mm) listed

**Processing Method:** Extrusion, Injection Molding

	Color / RAL DESIGN	Hardness DIN ISO 7619 ShoreA	Density DIN EN ISO 1183-1 g/cm <sup>3</sup>	Tensile Strength <sup>1</sup> DIN 53504/ISO 37 MPa	Elongation at Break <sup>1</sup> DIN 53504/ISO 37 %	Tear Resistance ISO 34-1 Methode B (b)(Graves) N/mm	CS 72 h/23 °C DIN ISO 815-1 Method A %	CS 24 h/70 °C DIN ISO 815-1 Method A %	CS 24 h/100 °C DIN ISO 815-1 Method A %
<b>TC4FRN</b>	natural	36	1.130	2.0	550	13.0	9	29	84
<b>TC4FRZ</b>	black	37	1.130	2.0	500	13.0	8	29	83
<b>TC5FRN</b>	natural	44	1.120	2.5	600	14.0	10	34	84
<b>TC5FRZ</b>	black	49	1.130	2.5	550	13.0	10	30	79
<b>TC6FRN</b>	natural	57	1.100	3.5	600	16.0	10	40	80
<b>TC6FRZ</b>	black	60	1.130	3.5	600	17.0	13	35	80
<b>TC7FRN</b>	natural	65	1.100	4.0	650	18.0	15	34	84
<b>TC7FRZ</b>	black	67	1.100	4.0	600	20.0	16	33	80
<b>TC8FRN</b>	natural	76	1.100	5.0	650	22.0	17	47	82
<b>TC8FRZ</b>	black	79	1.100	5.0	600	24.0	25	45	84

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.

**FR Series**
**THERMOLAST® K**

	<b>Color / RAL DESIGN</b>	<b>Hardness</b> DIN ISO 7619 ShoreA	<b>Density</b> DIN EN ISO 1183-1 g/cm <sup>3</sup>	<b>Tensile Strength</b> <sup>1</sup> DIN 53504/ISO 37 MPa	<b>Elongation at Break</b> <sup>1</sup> DIN 53504/ISO 37 %	<b>Tear Resistance</b> ISO 34-1 Methode B (b)(Graves) N/mm	<b>CS 72 h/23 °C</b> DIN ISO 815-1 Method A %	<b>CS 24 h/70 °C</b> DIN ISO 815-1 Method A %	<b>CS 24 h/100 °C</b> DIN ISO 815-1 Method A %
<b>TC9FRN</b>	natural	85	1.100	6.0	600	39.0	36	55	83
<b>TC9FRZ</b>	black	87	1.100	6.0	550	31.0	36	55	80

<sup>1</sup> Deviating from ISO 37 standard test piece S2 is tested with a traverse speed of 200 mm/min.

All values published in this data sheet are rounded average values.  
Specification limits are based on three-fold standard deviation from the average value.


## Compression Set

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.

# Compression Set (acc. DIN ISO 815)

For the compression set testing the following specimen is used:  
The specimen is a cylindrical disk shaped 6 mm thick and 13 mm in diameter.

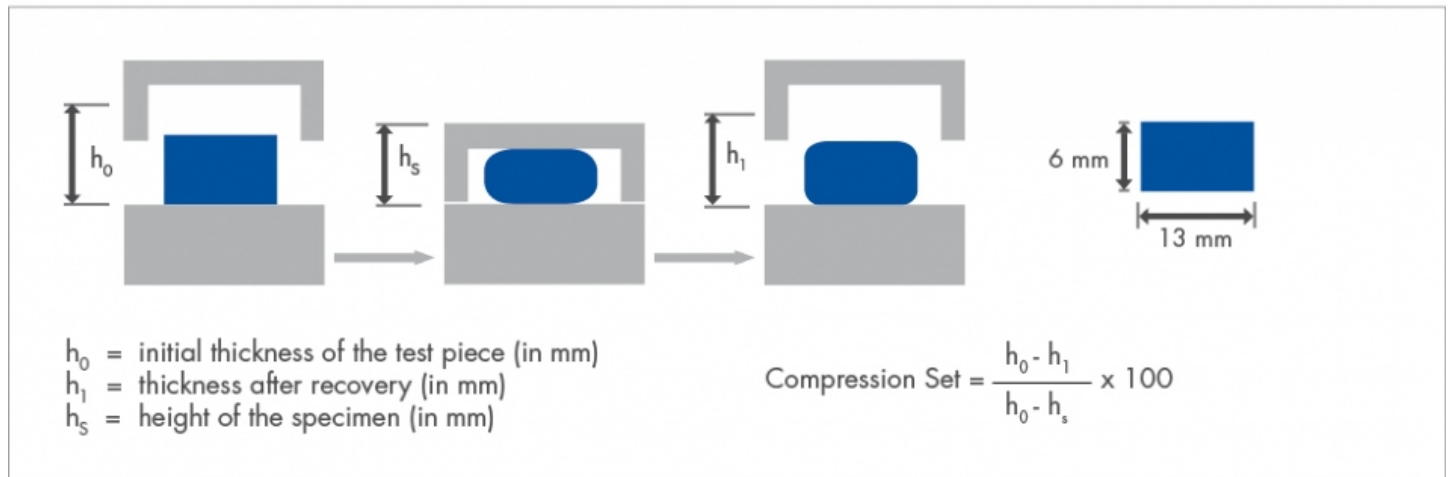

The specimen is compressed by 25%. The compressed specimen is heated to the test temperature. DIN ISO 815 describes two methods.

**Method A:** The specimen is allowed to recover immediately after its aging in the oven and then cooled down to room temperature. After 30 minutes the thickness of the specimen is measured and the compression set calculated.

**Method B:** The specimen is cooled down to room temperature after its aging in the oven and then allowed to recover.

Test results gained from method B are in general higher than from method A.

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.

**FR Series**
**THERMOLAST® K**
**Processing Guideline Injection Molding**

Cylinder temperature	180 - 200 - 220 °C, max. 220 °C (360 - 390 - 430 °F, max. 430 °F)
Hotrunner	Hot runner temperatures: 180 - 220 °C (356 - 428 °F). The runner should be empty after a maximum of 2 - 3 shots.
Injection pressure	200 - 1000 bar (2900 - 14504 psi) (depending on the size and weight of the part).
Injection rate	In general, the fill time should not be more than 1–2 seconds.
Hold pressure	We recommend to derive the optimum hold pressure from determining the solidification point, starting with 40 % - 60 % of the required injection pressure.
Back pressure	20 - 100 bar; if colour batches are used, higher back pressure is necessary.
Screw retraction	If an open nozzle is used processing with screw retraction is advisable.
Mold temperature	25 - 40 °C (77 - 104 °F)
Pre drying	To achieve optimum mechanical values the following procedures have to be kept: a. Material has to be predried efficiently. Air dryer - at least 4h/80 °C (4h/175 °F), residual moisture < 0,02%. b. Material has to be processed immediately after drying. Avoid moisture absorption in the funnel (funnel must be covered). c. Before opening the bag, material has to be at room temperature in order to avoid condensation due to cold material. d. Keep the filling level in the funnel low.
Needle valve	With materials < 50 Shore A the use of a needle valve is advisable.
Screw geometry	Standard 3-zone polyolefine screw.
Residence time	The residence time is to be set as short as possible with a maximum of 10 minutes.
Cleaning recommendation	For cleaning and purging of the machine it is appropriate to use polypropylene or polyethylene. Machine must be PVC-free.

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.

**FR Series**
**THERMOLAST® K**
**Processing Guideline Extrusion**

Cylinder temperature	160 - 190 - 220 °C, max. 230 °C (320 - 370 - 425 °F, max. 450 °F)
Screw geometry	Standard three-zone screw (e.g. polyolefin screw). The screw must be able to provide sufficient shearing.
L/D ratio	At least 25
Compression ratio	At least 2,7 ... 3,5 : 1
Screens / breaker plate	A breaker plate and a screen pack are recommended in the extruder configuration in order to increase pressure. In minimum two screen packs of 100 mesh are recommended.
Die land	<= 3 mm ( <= 0,12 in.)
Extruder Head	Ca. 190 - 210 °C (374 - 410 °F)
Die temperature	Ca. 180 - 190 °C (374 - 410 °F)
Pre drying	Drying of the material for at least four hours at 80°C (175°F) is recommended. The moisture level of material has to be below 0.02 %.
Calibration	Generally not necessary; support elements may be required when extruding THERMOLAST® compounds with high hardness or when coextruding with standard thermoplastics.
Cleaning recommendation	For cleaning and purging of the machine it is appropriate to use polypropylene or polyethylene. Machine must be PVC-free.

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.