

VS/AD1 Series
COPEC®

The VS/AD1 Series is your material solution for applications in the consumer electronics section. The compounds feature an exceptionally silky and velvety surface, accompanied by excellent adhesion properties to polar thermoplastics such as ABS, PC and PC/ABS.

Typical applications

- Ear phones
- Game consoles
- Handles and grips for consumer applications
- Remote controls
- Seals

Material advantages

- Easy coloring (compounds in natural colors)
- Excellent color stability
- Good weathering resistance
- Insert molding possible
- Pleasant surface feel (Soft touch)
- Resistance against skin oil, sunscreens and olive oil
- Smooth and silky surface
- UL 94 HB listed

Processing Method: Extrusion, Injection Molding

	Color / RAL DESIGN	Hardness DIN ISO 7619 ShoreA	Density DIN EN ISO 1183-1 g/cm ³	Tensile Strength ¹ DIN 53504/ISO 37 MPa	Elongation at Break ¹ DIN 53504/ISO 37 %	Tear Resistance ISO 34-1 Methode B (b)(Graves) N/mm	CS 72 h/23 °C DIN ISO 815-1 Method A %	CS 24 h/70 °C DIN ISO 815-1 Method A %	CS 24 h/100 °C DIN ISO 815-1 Method A %	Adhesion to ABS VDI 2019 N/mm	Adhesion to PC VDI 2019 N/mm
CC60CN	natural	58	1.260	6.0	1000	23.5	21	51	76	5.5 (A)	5.5 (A)
CC60CZ	black	59	1.260	5.5	900	23.5	18	52	72	6.0 (D)	5.5 (B)
CC70CN	natural	67	1.290	6.5	1000	28.0	15	51	70	7.0 (D)	8.0 (D)
CC70CZ	black	68	1.280	6.5	900	28.0	16	52	70	8.5 (B/D)	8.0 (B/D)
CC80CN	natural	76	1.330	6.5	850	31.0	21	52	73	10.5 (D)	10.0 (B/D)
CC80CZ	black	76	1.310	7.5	900	31.0	18	57	69	10.5 (D)	10.0 (D)

¹ Deviating from ISO 37 standard test piece S2 is tested with a traverse speed of 200 mm/min.

Please note: Frozen stresses in Polycarbonate (PC) may cause stress cracking in 2-component applications with PC and COPEC®.

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.


Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.

All values published in this data sheet are rounded average values.
 Specification limits are based on three-fold standard deviation from the average value.


Description peel test

Peel test according to VDI guide line 2019

Test Setup

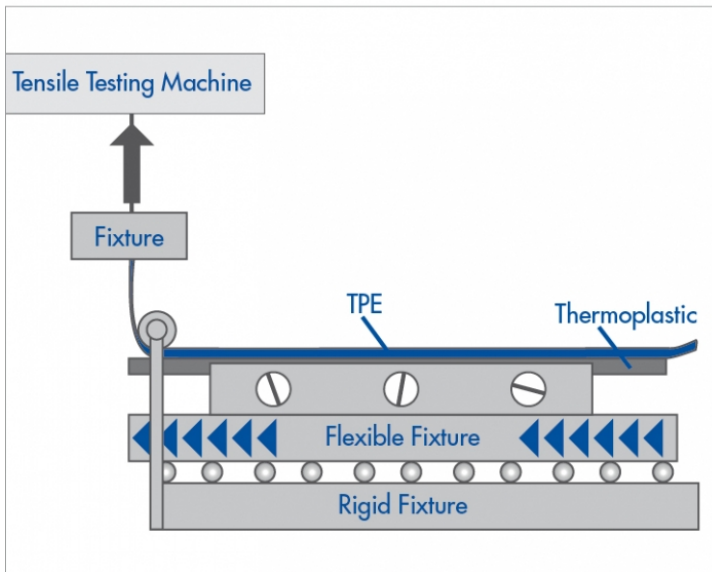

Example diagram for results of a peel test

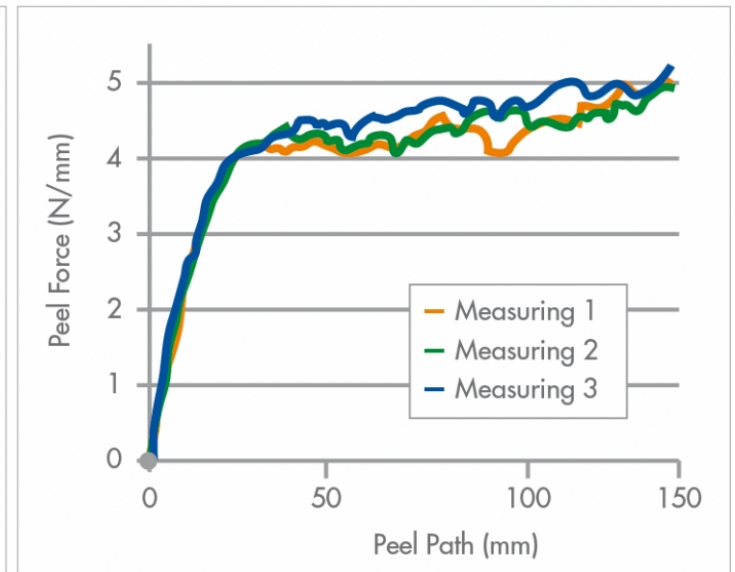


Classification

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.


Peel test according to VDI Guideline 2019

For the VDI peel test we add two characters to the peelforce value.
The first character describes the TPE residue on the hard component.

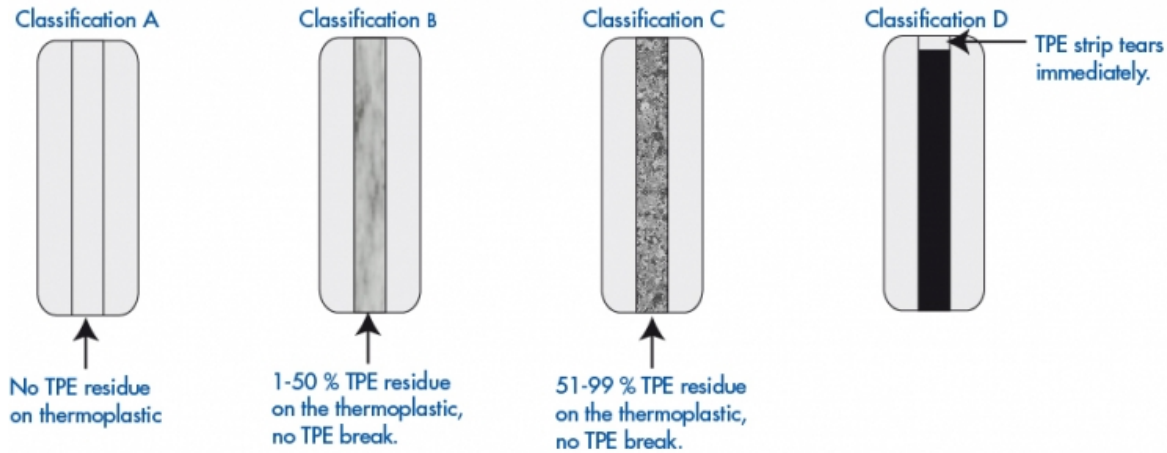

A	No TPE residue on hard component
B	Up to 50 % TPE residue on hard component
C	50 to 99 % TPE residue on hard component
D	TPE strip tears immediately

The second character describes if the TPE strip will tear during the measurement at any position on the peel path.

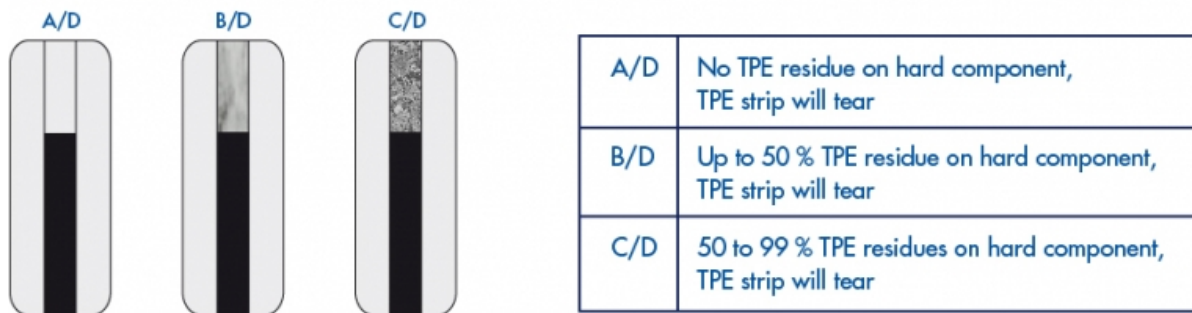

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.

VS/AD1 Series
COPEC®
Processing Guideline Injection Molding

Cylinder temperature	160 - 180 - 220 °C, max. 220 °C (320 - 360 - 430 °F, max. 430 °F)
Hotrunner	Hot runner temperatures: 180 - 220 °C (356 - 428 °F). The runner should be empty after a maximum of 2 - 3 shots.
Injection pressure	200 - 1000 bar (2900 - 14504 psi) (depending on the size and weight of the part).
Injection rate	In general, the fill time should not be more than 1–2 seconds.
Hold pressure	We recommend to derive the optimum hold pressure from determining the solidification point, starting with 40 % - 60 % of the required injection pressure.
Back pressure	20 - 100 bar; if colour batches are used, higher back pressure is necessary.
Screw retraction	If an open nozzle is used processing with screw retraction is advisable.
Mold temperature	The mold temperature depends on the hard component. A temperature exceeding 80 °C (175 °F) should be avoided. The common temperature is 40 - 60 °C (105 - 140° F).
Pre drying	To achieve optimum mechanical values the following procedures have to be kept: a. Material has to be predried efficiently. Air dryer - at least 4h/80 °C (4h/175 °F), residual moisture < 0,02%. b. Material has to be processed immediately after drying. Avoid moisture absorption in the funnel (funnel must be covered). c. Before opening the bag, material has to be at room temperature in order to avoid condensation due to cold material. d. Keep the filling level in the funnel low.
Needle valve	The use of a needle valve nozzle is advisable .
Screw geometry	Standard 3-zone polyolefine screw.
Residence time	The residence time is to be set as short as possible with a maximum of 10 minutes.
Cleaning recommendation	For cleaning and purging of the machine it is appropriate to use polypropylene or polyethylene. Machine must be PVC-free.

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.

VS/AD1 Series
COPEC®
Processing Guideline Extrusion

Cylinder temperature	160 - 180 - 200 °C (320 - 360 - 390 °F). For Coextrusion with engineering thermoplastics temperature profile should be increased up to 30 °C (85 °F); maximum 230 °C (440 °F)
Screw geometry	Standard three-zone screw (e.g. polyolefin screw). The screw must be able to provide sufficient shearing.
L/D ratio	At least 25
Compression ratio	At least 3 : 1
Screens / breaker plate	A breaker plate and a screen pack are generally recommended in the extruder configuration in order to increase pressure.
Die land	<= 3 mm (<= 0,12 in.)
Extruder Head	Ca. 220 °C (430 °F)
Die temperature	Ca. 220 °C (430 °F)
Pre drying	Drying of the material for at least four hours at 80°C (175°F) is recommended. The moisture level of material has to be below 0.02 %.
Calibration	Generally not necessary; support elements may be required when extruding THERMOLAST® compounds with high hardness or when coextruding with standard thermoplastics.
Cleaning recommendation	For cleaning and purging of the machine it is appropriate to use polypropylene or polyethylene. Machine must be PVC-free.

This datasheet is an extract of the KRAIBURG TPE program. Please contact KRAIBURG TPE to select the compound suitable for the requirements.

Disclaimer: The information provided in this documentation corresponds to our knowledge on the subject at the date of its publication and may be subject to revision as new knowledge and data becomes available. All values reported are typical values based on sample test results and are not a guarantee of performance. The responsibility to conduct testing to determine suitability of use for the particular process or end-use application remains with the customer. KRAIBURG TPE does not warrant or assume any liability with regards to the use of the information presented in this document.